

MarsLG® Deck/Post Fixture (36DK01BS) Installation Sheet

FOR OUTDOOR USE ONLY WITH LOW VOLTAGE 12-VOLT TRANSFORMERS


IMPORTANT SAFETY INSTRUCTIONS

WARNING – To reduce the risk of FIRE OR BODILY INJURY:

- Turn off/unplug power and allow to cool before replacing bulb.
- Keep combustible material away from luminaire.
- Do not operate luminaire fitted with a missing or damaged shroud/lens cover.

NOTE: Always use UL, cUL, and CSA recognized wire connectors for connections.

LUMINAIRE IS ETL-LISTED FOR ABOVE GROUND INSTALLATION ONLY.

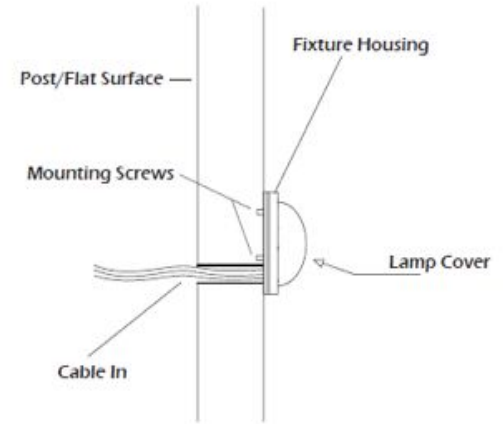

LIGHT FIXTURE MOUNTING:

1. Prior to installing or servicing this product, disconnect transformer from power source.
2. Remove lamp cover of light fixture by twisting it counterclockwise until the dots align (Fig. 1A & Fig 1B).
3. Drill hole through post or flat mounting surface to feed lead wire through.
4. Make sure that the arrow is pointed straight up (Fig. 2). Position fixture against mounting surface and mark surface through both screw slots.
5. While light fixture is positioned in place, install mounting screws through the light fixture screw slots (Fig. 2)
6. Strip the (2) leads from the light fixture pigtail wire. Using the two (2) silicone filled waterproof wire connectors (not included), connect the leads from the light fixture to the main supply cable leads.
7. Insert G4 bulb (included in box) into bulb socket.

For replacement G4 bulbs, go to ledwholesalers.com, search for 1106, and select Warm White color.

8. Reinstall lamp cover by replacing the O-ring, aligning the dots, and twisting the lamp cover clockwise to secure in place.



Fig. 1A



Fig. 1B

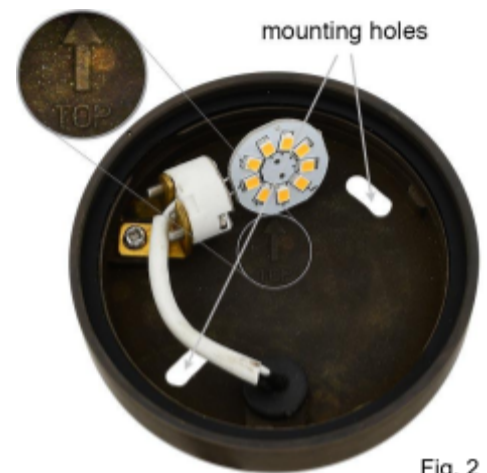


Fig. 2